




**F7459-CHT**  
Brite White



**F7927-CHT**  
Folkestone

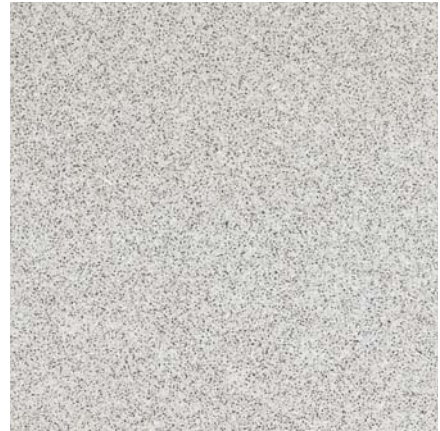

**F7507-CHT**  
Folkestone Grafix

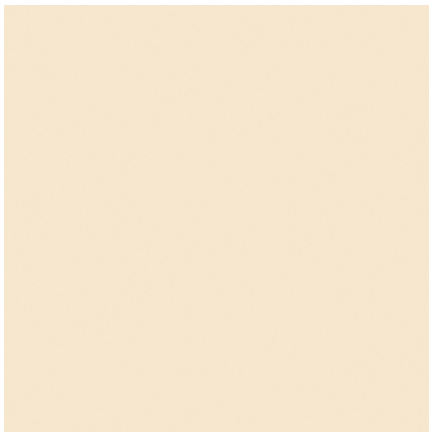

**F7932-CHT**  
Antique White



**F7837-CHT**  
Graphite



**F7522-CHT**  
Blue Silk Grafix

### Availability

Item Ref.	Grade	Sheet Size (mm)	
		3050x1220	3660x1525
Range	PF*	•	•
Range	CBS* (CGS)† (P3-3) 16mm	•	•
Range	CBS* (CGS)† (P3-3) 19mm	•	•

\*PF and CBS do not appear in the EN438 classification system

†Compact grade CBS (CGS) has black core

**Austria**

Formica GmbH  
 Bachlaan 2  
 Postbus 44  
 NL-2250 AA Voorschoten  
 Tel: +43 6225 24 33  
 Fax: +43 6225 24 35

**Belgium**

Formica Belgium N.V.  
 Bachlaan 2  
 Postbus 44  
 NL-2250 AA Voorschoten  
 Tel: +32 (0) 2 705 18 18  
 Fax: +32 (0) 2 705 17 72

**Denmark**

Formica Danmark A/S  
 Industriparken 4  
 DK-2750 Ballerup  
 Tel: +45 43 58 82 00  
 Fax: +45 43 58 82 55

**Finland**

Formica IKI Oy  
 FI-35990 Kolho  
 Tel: +358 3 580 001  
 Fax: +358 3 531 6020

**France**

Formica S.A.  
 Bât. Le Mandinet II  
 2/4, Rue du Suffrage Universel  
 FR-77185 Lognes  
 Tel: +33 1 60 06 86 86  
 Fax: +33 1 60 17 61 41

Formica (Warehouse)  
 B.P. 120  
 Rué du Général de Gaulle  
 Zone Industrielle  
 FR-57730 Valmont  
 Tel: +33 1 87 29 10 40  
 Fax: +33 3 87 29 10 33

**Germany**

Formica Vertriebs-GmbH  
 Bachlaan 2  
 Postbus 44  
 NL-2250 AA Voorschoten  
 Tel: +49 (0) 2241 95200  
 Fax: +49 (0) 2241 952060

**Holland**

Formica Nederland b.v.  
 Bachlaan 2  
 Postbus 44  
 NL-2250 AA Voorschoten  
 Tel: +31 715 61 4444  
 Fax: +31 715 61 5930

**Ireland**

Formica Limited  
 Block B, Arran Court  
 Arran Quay  
 IR-DUBLIN 7  
 Tel: +353 (0)1 872 4322  
 Fax: +353 (0)1 872 4623

**Italy**

Formica Italia s.r.l  
 Via dei Tulipani 3 - Palazzo B  
 I-20090 Pieve Emanuele  
 MILANO  
 Tel: +39 02 9040121  
 Fax: +39 02 90401298

**Norway**

Formica Norge AS  
 Fekjan 13 A  
 Postboks 81  
 NO-1378 Nesbru  
 Tel: +47 66 98 48 00  
 Fax: +47 66 98 03 58

**Poland**

Formica PSM Sp z o.o.  
 Al. St. Zjednoczonych 61 A  
 PL-04-028 Warszawa  
 Tel: +48 22 516 20 84/85  
 Fax: +48 22 516 2079

**Spain**

Formica s.a.  
 Avda. Txomin Egileor, 54  
 ES-48960 Galdakao (Viscaya)  
 Tel: +34 944 579 600  
 Fax: +34 944 566 306

Formica s.a.  
 Ctra. Valencia-Alicante km.280  
 ES-46470 Albal (Valencia)  
 Tel: +34 961 262 800  
 Fax: +34 961 265 612

**Sweden**

Formica Skandinavien AB  
 Florettgatan 22  
 SE-254 67 Helsingborg  
 Tel: +46 42384800  
 Fax: +46 42384820

**Switzerland**

Formica (Schweiz) A.G.  
 Bachlaan 2  
 Postbus 44  
 NL-2250 AA Voorschoten  
 Tel: +41 1 818 88 18  
 Fax: +41 1 817 01 82


**United Kingdom**

Formica Limited  
 Coast Road  
 North Shields  
 GB-Tyne & Wear  
 NE29 8RE  
 Tel: +44 (0) 191 259 3000  
 Fax: +44 (0) 191 258 2719

[www.formica.eu.com](http://www.formica.eu.com) [www.formica.co.uk](http://www.formica.co.uk)




Formica Limited, Coast Road, North Shields, Tyne & Wear NE29 8RE, Tel: 0191 259 3000, Fax: 0191 258 2719, [www.formica.co.uk](http://www.formica.co.uk)  
 Formica, the Formica logo and Chemtop are registered trademarks of The Diller Corporation.  
 Chemtop® is a trademark of The Diller Corporation.



Cl/Sfb  
Fn8



Chemtop<sup>2</sup>  
Advanced Chemical Resistance



[www.formica.eu.com](http://www.formica.eu.com)





**Chemtop<sup>2</sup>**  
Advanced Chemical Resistance



Formica® Chemtop2™ is unrivalled in applications for high stress environments that require resistance to harsh chemicals. Formica Chemtop2 surfaces can be used for horizontal and vertical applications and, in conjunction with Formica® HPL laminates, offer versatility in design from work benches to fume cupboard walls.

### Advanced Chemical Resistance

Chemtop2™ technology features an advanced chemical resistant surface that is ideal for high stress environments where relatively harsh acids, alkalis, corrosive salts and other destructive or staining substances are used.

### Cost-effective

Offered in 16mm and 19mm compact grade and in postforming grade laminate, Chemtop2 is easy to fabricate, extremely durable and requires little maintenance, resulting in exceptionally low life-cycle cost.

### Design

The six designs offer a practical and attractive range for most applications and working environments. These designs are offered in two different sheet sizes and are supported by efficient service and a high level of stock availability.

### Environments and applications

Formica Chemtop2 is the quality, versatile, reliable and cost-effective solution for critical working environments:

- Chemical, medical, scientific and pathogenic laboratories
- Photographic laboratories
- Mortuaries
- Clinics
- Nursing stations
- Commercial and light-duty manufacturing operations

Chemtop2 is intended for application to interior horizontal and vertical surfaces where resistance to relatively harsh acids, alkalis, corrosive salts and other destructive or staining substances is required without compromising design or appearance.





**Chemtop<sup>2</sup>**  
Advanced Chemical Resistance



Whatever your application, Chemtop2 offers supreme performance, giving you confidence in your critical work surfaces:

- Laboratory benches
- Counters
- Fume cupboards
- Cabinets
- Wall panels and splashbacks
- Screens

NOTE: Chemtop2 laminate should be protected from damage caused by heat, such as heat created from Bunsen burners. The Bunsen burner should be placed on a trivet to protect the laminate surface.

NOTE: Formica Chemtop2 incorporates a special integrated coating which gives the product its chemical-resistant properties and a slightly different hue from its corresponding standard high pressure laminate (HPL) item. This colour difference does not constitute a defect. Please ensure you view actual Formica Chemtop2 samples before specifying. Butt joint matches between Formica Chemtop2 and standard HPL are not recommended, while horizontal/vertical matches are acceptable. It is highly recommended that Formica Chemtop2 be used for an entire project as standard HPL will not provide the same degree of chemical resistance.



## Use and Care

Formica Chemtop2 laminate surfaces may be cleaned with a damp cloth and mild detergent. Use of abrasive cleaners, powders, scouring pads, steel wool, sandpaper, etc., will damage the finish and can permanently reduce the stain and chemical resistance of the laminate. Good laboratory practice dictates that all chemical spills should be wiped up promptly. Stubborn stains may be removed by use of organic solvent or hypochlorite bleach, followed by wiping with a soft, damp cloth. If in doubt about the suitability of a particular cleaner or detergent, check with the manufacturer of the cleaning product.



## Performance Compliance of Formica Chemtop2

Physical Properties	EN438 Test	Chemtop2	EN438
Resistance to Surface Wear	10	600	350
Resistance to Impact Small Ball	20	35	20
Dimensional Stability Elevated Temp	17	0.5, 0.8	0.55, 1.05
Resistance to Scratching	25	5	3
Resistance to Boiling Water	12	5	4
Resistance to Staining	26	5.5	3.4
Light Fastness	27	6	4
Resistance to Water Vapour	14	4	4
Formability (T)	31-32	14mm	14mm
Blister Resistance	33-34	30	10



## Chemical and Stain Resistance

### Acids

Hydrochloric acid 10%	Hydrochloric acid 37%	Sulphuric acid 33%
Sulphuric acid 98%*	Nitric acid 30%	Nitric acid 65%*
Phosphoric acid 85%	Acetic acid 99%	Chromic acid 60%

### Bases

Ammonium Hydroxide 28%

### Biological Stains

Arcidine orange 1%	Basic fuchsin 1%*	Carbol fuchsin 1%*
Malachite green oxalate 1%	Methylene blue 1%	Methyl violet 2B 1%*
Wright stain 1%	Gentian Violet (dye) 1%*	Most conventional cleaning agents

### Organic Chemicals

Formaldehyde 37%      Furfural 10%

### Salt

Silver Nitrate 1%	Potassium permanganate 10%*	Ferric (III) chloride 10%
Copper sulphate 10%	Sodium hypochlorite 13%	Sodium chloride 10%

### Solvents

Acetone	Ethylalcohol	Ethylene glycol
Methylethylketone	Dichloromethane	Ethylacetate
Acetic anhydride	n-Butyl acetate	n-Hexane
Methylalcohol	Methylisobutylketone	Tetrahydrofurane
Toluene	Trichloroethylene	Xylene

\*Reagents marked with an asterisk (\*) may cause slight change in gloss or colour depending on the duration of exposure.

### Test Procedure

5 drops of each reagent were applied on the surface and covered with a watchglass. The chemicals were tested over 24 hours.